



Sales Director: Darcy  
Whatsapp: 008613425174299  
Email: Darcy@szledworld.com

## Rental led display (500x500cabinet)




### Features:

- Suitable for P3.91,P4.81,P5.95,P6.25 indoor and outdoor;
- Seamless connecting tech, high resolution,presenting the Most real pictures ;
- High contrast,ideal gray scale,presenting the clear and Bright pictures ;
- Fanless design ;
- The appearance is very elegant, quality is very stable ;
- The most effective solution for indoor HD billboard ;
- Easy to install: No tool needed during installation ;
- Light weight:7~8 kg/cabinet ;
- It support front service and rear service.



Cabinet 1

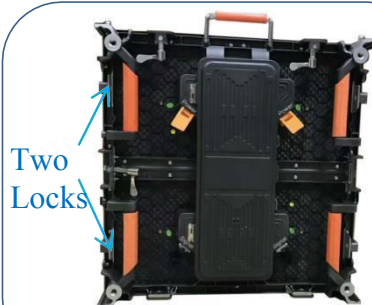

Cabinet 2



## Application:

Stage Performance       Conference       Celebration       banquet       exhibition

## Technical Specifications:

Parameter	P3.91 indoor	P4.81 indoor	P4.81 outdoor	P5.95 indoor	P6.25 indoor	P6.25 outdoor
Pixel pitch	3.91mm	4.81mm	4.81mm	5.95mm	6.25mm	6.25mm
LED Type	SMD2121 Black	SMD2121 Black	SMD2727	SMD3528 White	SMD3528 White	SMD3535 White
Scan Style	1/16	1/13	1/13	1/11	1/10	1/10
Pixel Density	65,536	43,264	43,264	28,224	25,600	25,600
Module size(mm)	250W * 250H					
Cabinet Size(mm)	500 W*500 H	500 W*500 H	500 W*500 H	500 W*500 H	500 W*500 H	500 W*500 H
Pixels/Cabinet	128x128	104x104	104x104	84x84	80x80	80x80
Refresh rate	>1920Hz	>1920Hz	>1920Hz	>1920Hz	>1920Hz	>1920Hz
Brightness	>1300Nits	>1300Nits	>4100Nits	>2000Nits	>1600Nits	>4100Nits
Max Power/ panel	360W	360W	360W	360W	360W	360W
Weight per cabinet	about 7Kg	about 7Kg	about 8Kg	about 7Kg	about 7Kg	about 8Kg
Best viewing distance	≥4m	≥4.8m	≥4.8m	≥5.9m	≥6.2m	≥6.2m
Cabinet material	Die-casting aluminum					
Operating temperature	-30°C---- +60°C					
Operating humidity	10%---%95RH					
Operating system	Windows XP / Windows 7 /Windows8 /Windows8.1/Windows 10					
Notes:	Specifications are for reference only. Please contact our salesperson for details. All rights are Reserved to Led World.					